

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5 : B65G 53/46	A1	(11) International Publication Number: WO 95/00426 (43) International Publication Date: 5 January 1995 (05.01.95)
<p>(21) International Application Number: PCT/GB94/01376</p> <p>(22) International Filing Date: 24 June 1994 (24.06.94)</p> <p>(30) Priority Data: 9313025.0 24 June 1993 (24.06.93) GB</p> <p>(71) Applicant (for all designated States except US): MACAWBER LIMITED [GB/GB]; Shaw Lane Industrial Estate, Doncaster DN2 4SE (GB).</p> <p>(72) Inventor; and (75) Inventor/Applicant (for US only): SNOWDON, Brian [GB/GB]; Macawber Limited, Shaw Lane Industrial Estate, Doncaster DN2 4SE (GB).</p> <p>(74) Agent: HARRISON, Michael, Robert; Michael Harrison & Company, 22 The Grange Road, Leeds, West Yorkshire LS16 6HA (GB).</p>	<p>(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, ES, FI, GB, GE, HU, JP, KE, KG, KP, KR, KZ, LK, LU, MD, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SI, SK, TJ, TT, UA, US, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report.</i></p>	

(54) Title: **PNEUMATIC CONVEYING SYSTEMS**

(57) Abstract

Apparatus for supplying granular or powdered material into a pneumatic conveying line (3) includes a pressurised feed vessel (9) having a material inlet (11) through which material may be supplied to said feed vessel while maintaining pressure therein. The pressure is balanced between the interior of the feed vessel and the outlet, and the outlet includes a material feed device (15) which has circumferentially spaced apart, radial blades (31) mounted for rotation about a substantially vertical axis in order to convey material falling between adjacent blades to an entrance to said pneumatic pipeline located below said blades.

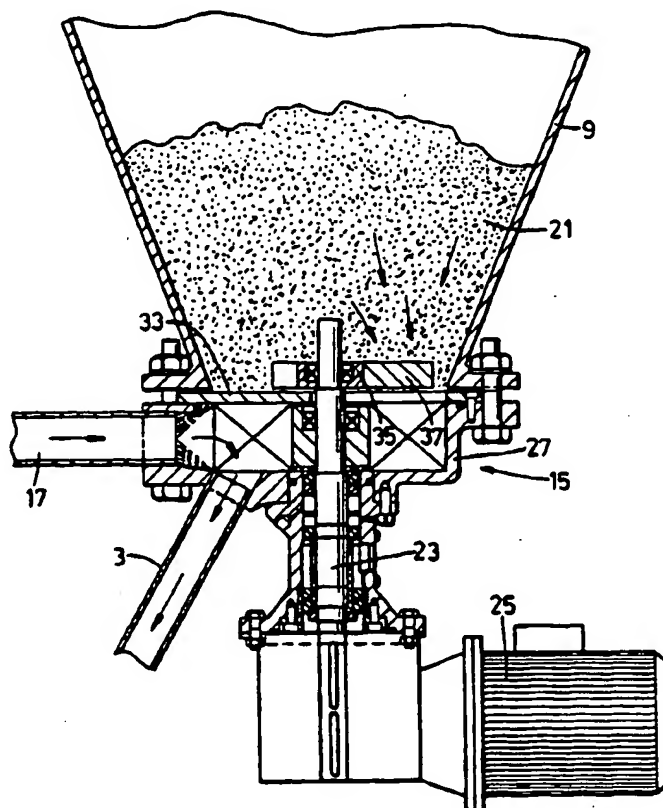

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

PNEUMATIC CONVEYING SYSTEMS

This invention relates to pneumatic material conveying systems and in particular to that part of such a system for supplying granular or powdered material into a pneumatic conveying line.

- 5 It is known to provide apparatus for supplying material into a pneumatic conveying line which incorporates screw-type devices. Apparatus incorporating such devices is limited in capacity and its ability to handle fine powdered material due to the inherent weaknesses of the screw-type design when used
10 as a metering feeder. At large flow rates, typically above 6m³/hour of material, there is a tendency for many fine powdered materials to retain air and remain in a "fluid" condition within the screw device. In this condition, the frictional relationship between the screw and tube in which
15 it turns is lost, and the material "flushes" or runs uncontrollably through the screw device.

- According to the present invention there is provided apparatus for supplyin granular or powdered material into a pneumatic
20 conveying line comprising a pressurised feed vessel having a material inlet through which material may be supplied to said feed vessel while maintaining pressure therewithin, said vessel having a material outlet through which material may be fed to the pneumatic conveying pipeline, pressure balance
25 means interconnecting the interior of the feed vessel and said outlet to balance the pressure therebetween, said material outlet including a material feed device having circumferentially spaced apart, radial blades mounted for rotation about a substantially vertical axis in order to
30 convey material falling between adjacent blades to an entrance to said pneumatic conveying pipeline located below said blades.

- In apparatus acc rding to the present invention, the material
35 being supplied can be of fluid c nditi n and the apparatus

will work perfectly normally in such a situation. Capacities in excess of 100m³/hour are possible.

By using a rotary blade feeding device in a vessel in which the pressure therewithin is balanced with that of the pipeline to which the material is being supplied, it is possible to eliminate any pressure differentials between the vessel and the pipeline and as a result the apparatus can be used at very high pressures. Indeed the only limitation on the vessel is due to the strength of the components and the seals of the shaft turning the blades. As a result it can cope with pressures of 20 barg or higher.

Because of the balancing of the pressures as mentioned above, there is no need to provide very small clearances between the rotor blades and the housing. Such small clearances would be required if there was any significant pressure differential between the interior of the supply vessel and the pneumatic conveying line.

An embodiment of apparatus in accordance with the present invention will now be described, by way of example only, and with reference to the accompanying drawings, in which:-

- Figure 1 is a diagrammatic elevational view of apparatus of the invention;

- Figure 2 shows in detail, and mainly in vertical section, the material feed device of the apparatus of Figure 1; and

- Figure 3 is a further detailed view, largely in plan, of the feed device of the apparatus of Figure 1.

Referring to Figure 1 of the accompanying drawings, apparatus 1 for supplying granular or powdered material into a pneumatic conveying line 3 is located below a storage bin 5 for the material and includes a double pressure vessel system having pressure vessels 7 and 9. In this way material may be fed

from storage bin 5 via valve 11 into pressure vessel 7. Valve 11 may be closed, vessel 7 pressurised and material then fed into pressure vessel 9 via valve 13. In this way the pressure within vessel 9 may be maintained throughout the operation of the entire system.

At the base of pressure vessel 9 there is located material feed device 15 which includes a rotary blade arrangement to be described in more detail below. Device 15 feeds material from pressure vessel 9 into conveying pipeline 3, conveying air being fed to device 15 via pipe 17. Interconnecting pipe 17 and the interior of pressure vessel 9 is a balance pipe 19 as a result of which the pressure in the feed device 15 is balanced with that in pressure vessel 9.

Material is fed from storage bin 5 into pressure vessel 9, via vessel 7, to an extent sufficient to maintain the material level within pressure vessel 9 above the level probe 21.

Referring to Figures 2 and 3 of the accompanying drawings material 21 within pressure vessel 9 is fed to conveying pipeline 3 by means of the rotary feed device 15, conveying air being supplied to said device by pipe 17. Rotary feed device 15 includes a drive shaft 23 mounted for rotation about a vertical axis and driven by means of motor and gear box arrangement 25. Mounted on drive shaft 15 within a housing 27 bolted to the bottom of pressure vessel 9, is a rotor 29 which includes a plurality of circumferentially spaced apart, radial blades 31.

Located directly above rotor 29 and extending over nearly half of the area swept up by the rotor is a plate 33. Plate 33 is located directly over the entrance to conveying pipeline 3 although separated therefrom by the rotor blades 31. Drive shaft 23 extends upwardly above rotor 29 and plate 33 terminating within pressure vessel 9 a short distance above this plate 33. Mounted on this upper portion of drive shaft 23 is a paddle wheel 35 having three circumferentially equally spaced apart, radially extending paddles 37.

As indicated by arrows in Figure 2 material flows from pressure vessel 9 and is swept by the paddles of paddle wheel 35 into the pockets between rotor blades 31 on that side of the rotor opposite the entrance to conveying pipeline 3, the other side being blocked by plate 33. As the rotor 29 turns, material is conveyed to the entrance to conveying pipeline 3. This material is propelled by air supplied along pipe 17 into conveying pipeline 3 to its point of use destination. Due to the balance of pressure between the pressure in the feed device 15 and the pressure vessel 9 above it, there is no need for the very small clearances between the rotor 29 and its housing 27 that would be required if there was a pressure differential and the pressure attainable in the conveying pipeline 3 is only limited by the strength of the vessel and the shaft seals in the feed device 15.

Adjustment of material flow rate is achieved by changing the speed of the motor 25 with an electrical frequency variator. In order to obtain very accurate feed rate control, the lower vessel can be mounted on a suitable weighing system.

CLAIMS

1. Apparatus for supplying granular or powdered
5 material into a pneumatic conveying line comprising a
pressurised feed vessel having a material inlet through which
material may be supplied to said feed vessel while maintaining
pressure therewithin, said vessel having a material outlet
10 through which material may be fed to the pneumatic conveying
line, pressure balance means interconnecting the interior of
the feed vessel and said outlet to balance the pressure
therebetween, said material outlet including a material feed
device having circumferentially spaced apart, radial blades
15 mounted for rotation about a substantially vertical axis in
order to convey material falling between adjacent blades to
an entrance to said pneumatic line located below said blades.

2. Apparatus according to Claim 1 in which the radial
blades are mounted for rotation on a common drive shaft
20 extending from a central position at the base of the feed
vessel downwardly towards a drive mechanism arranged below
said feed vessel.

3. Apparatus according to Claim 1 or Claim 2 in which
25 the feed vessel is provided with a plate extending
horizontally over at least a part of the space swept out by
the radial blades.

4. Apparatus according to Claim 3 in which the plate
30 extends over nearly half the area swept out by the radial
blades.

5. Apparatus according to any of the preceding claims
in which the radial blades are mounted on a common drive shaft
35 and, mounted also on the drive shaft, above said radial
blades, is means for sweeping material located above the
blades to ensure good feed of said material in a direction
towards said blades.

6. Apparatus according to Claim 5 in which the sweeping means is in the form of a paddle wheel having circumferentially spaced apart, radially extending paddles.

5 7. Apparatus according to any of the preceding claims in which the material outlet extends from the base of the feed vessel in a direction downwardly and radially outwardly from a position below the radial blades located radially outwardly of the centre of the feed vessel.

1/3

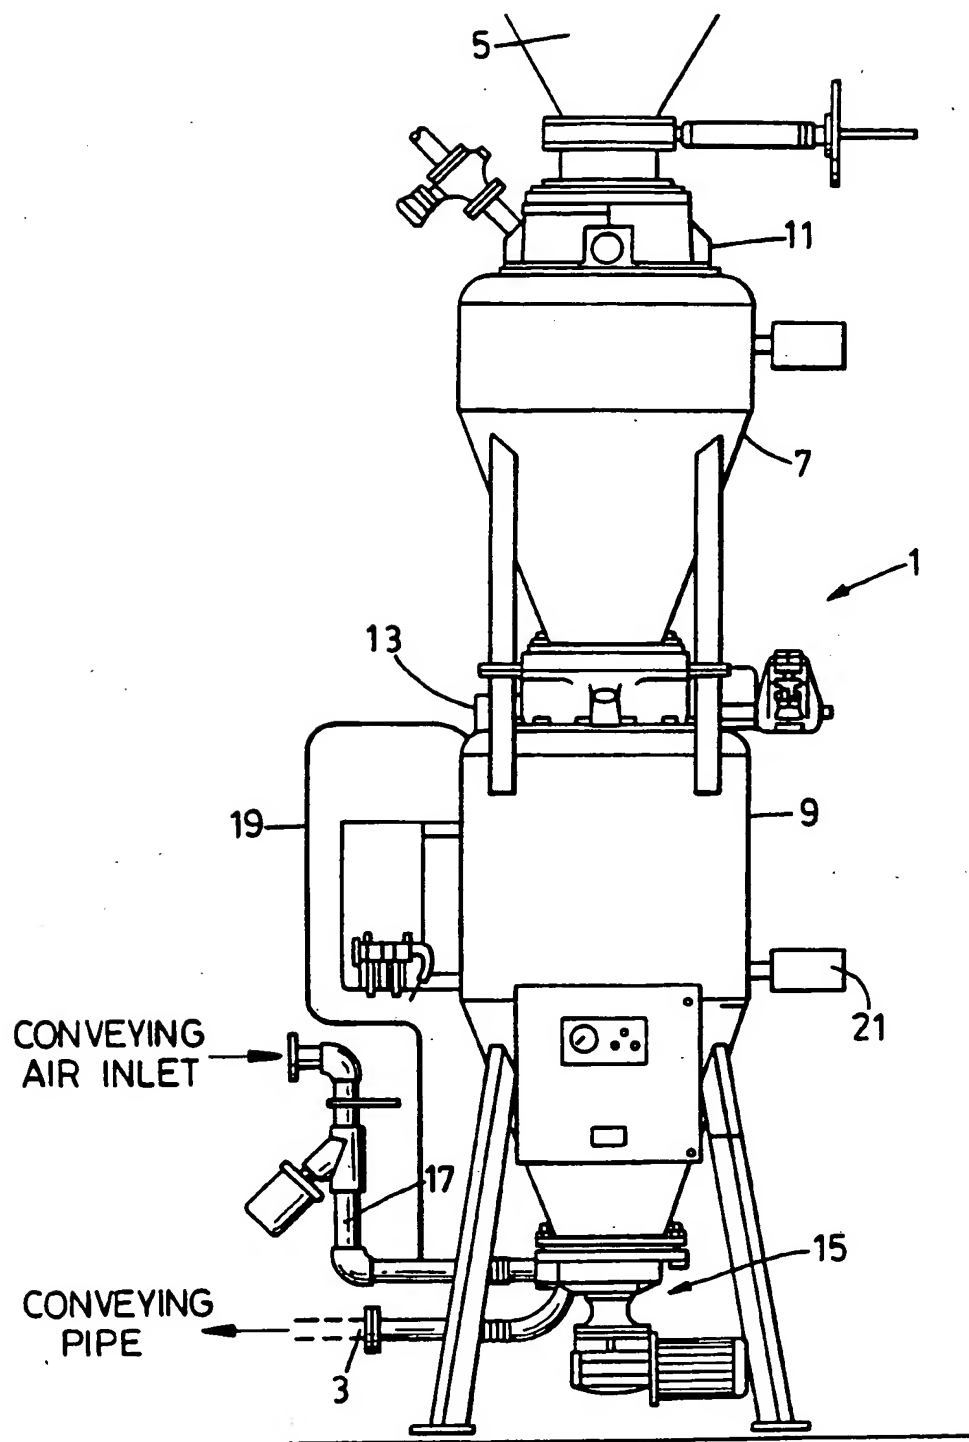


Fig. 1

2/3

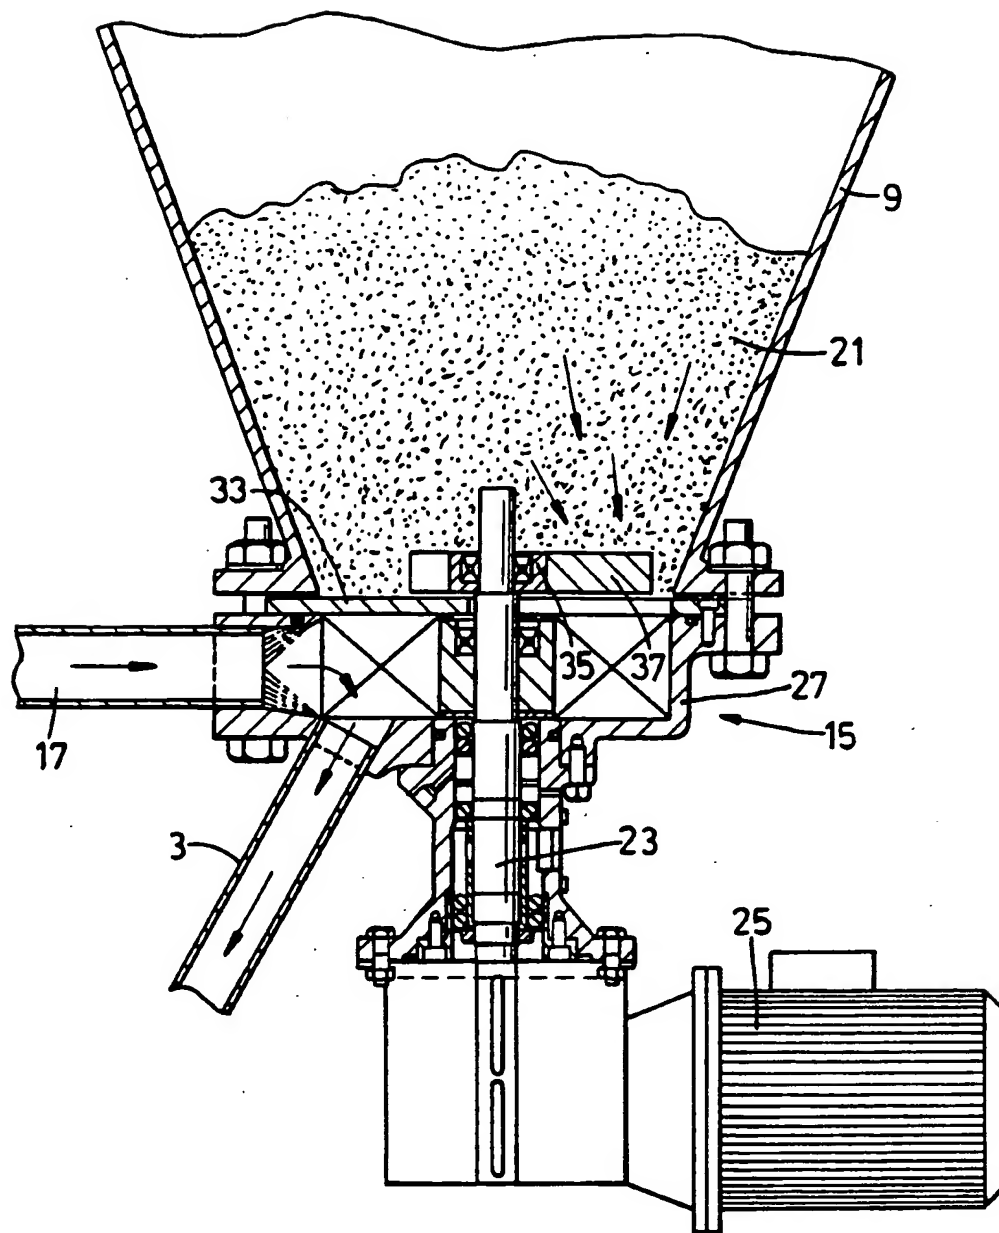


Fig. 2

3/3

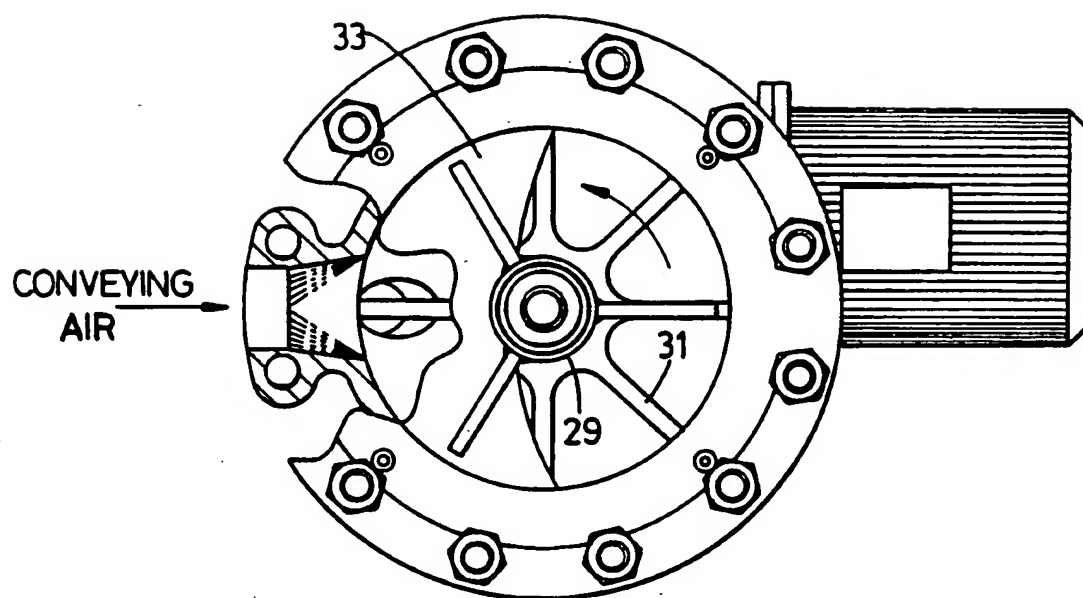


Fig. 3

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 94/01376

A. CLASSIFICATION OF SUBJECT MATTER
IPC 5 B65G53/46

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 5 B65G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP,A,0 212 256 (AVT ANLAGEN- UND VERFAHRENSTECHNIK GMBH) 4 March 1987 see the whole document -----	1-7

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

12 October 1994

Date of mailing of the international search report

14. 10. 94

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Beernaert, J

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 94/01376

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-0212256	04-03-87	DE-A- 3544014	19-02-87
		JP-A- 62043524	25-02-87
		US-A- 4747524	31-05-88
